



MT2304 Plastic-Encapsulate MOSFETS

N-Channel 30-V(D-S) MOSFET



FEATURE

TrenchFET Power MOSFET

APPLICATIONS

- Load Switch for Portable Devices
- DC/DC Converter

MARKING: 2304



SOT-23

Maximum ratings ($T_a=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	30	V
Gate-Source Voltage	V_{GS}	± 20	
Continuous Drain Current	I_D	3.3	A
Pulsed Drain Current	I_{DM}	15	
Continuous Source-Drain Diode Current	I_S	0.9	
Maximum Power Dissipation	P_D	0.35	W
Thermal Resistance from Junction to Ambient ($t \leq 5s$)	$R_{\theta JA}$	357	$^{\circ}\text{C}/\text{W}$
Storage Temperature	T_J	150	$^{\circ}\text{C}$
Junction Temperature	T_{STG}	-55 ~ +150	



Electrical characteristics (T_a=25°C unless otherwise noted)

Parameter	Symbol	Test condition	Min	Typ	Max	Units
Static						
Drain-source breakdown voltage	V _{(BR)DSS}	V _{GS} = 0V, I _D =250μA	30			V
Gate-source threshold voltage	V _{GS(th)}	V _{DS} =V _{GS} , I _D =250μA	1.2		2.2	
Gate-body leakage	I _{GSS}	V _{DS} =0V, V _{GS} =±20V			±100	nA
Zero gate voltage drain current	I _{DSS}	V _{DS} =30V, V _{GS} =0V			1	μA
Drain-source on-state resistance ^a	R _{DS(on)}	V _{GS} =10V, I _D =3.2A		0.049	0.060	Ω
		V _{GS} =4.5V, I _D =2.8A		0.061	0.075	
Forward transconductance ^a	g _{fs}	V _{DS} =4.5V, I _D =2.5A	2.5			S
Dynamic ^b						
Total gate charge	Q _g	V _{DS} =15V,V _{GS} =10V,I _D =3.4A		4.5	6.7	nC
		V _{DS} =15V,V _{GS} =4.5V,I _D =3.4A		2.1	3.2	
Gate-source charge	Q _{gs}			0.85		
Gate-drain charge	Q _{gd}			0.65		
Gate resistance	R _g	f =1.0MHz	0.8	4.4	8.8	Ω
Input capacitance	C _{iss}	V _{DS} =15V,V _{GS} =0V,f =1MHz		235		pF
Output capacitance	C _{oss}			45		
Reverse transfer capacitance	C _{rss}			17		
Turn-on delay Time	t _{d(on)}	V _{DD} =15V, R _L =5.6Ω, I _D ≈2.7A, V _{GEN} =4.5V,R _g =1Ω		12	20	ns
Rise time	t _r			50	75	
Turn-off delay time	t _{d(off)}			12	20	
Fall time	t _f			22	35	
Turn-on delay time	t _{d(on)}	V _{DD} =15V, R _L =5.6Ω, I _D ≈2.7A, V _{GEN} =10V,R _g =1Ω		5	10	
Rise time	t _r			12	20	
Turn-off delay time	t _{d(off)}			10	15	
Fall time	t _f			5	10	
Drain-source body diode characteristics						
Continuous source-drain diode current	I _S	T _C =25°C			1.4	A
Pulse diode forward current	I _{SM}				15	A
Body diode voltage	V _{SD}	I _S =-2.7A,V _{GS} =0V		0.8	1.2	V






Notes :

a. Pulse Test : Pulse width ≤ 300μs, duty cycle ≤ 2%.

b. Guaranteed by design, not subject to production testing.



Typical Characteristics

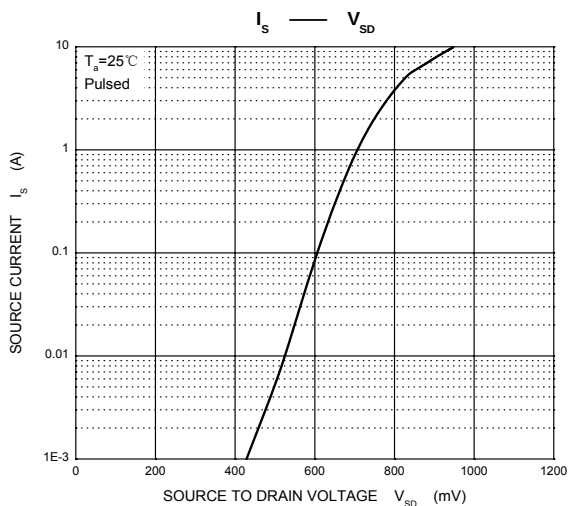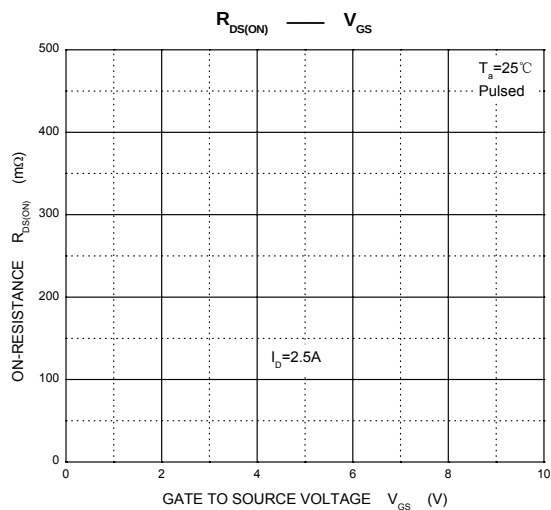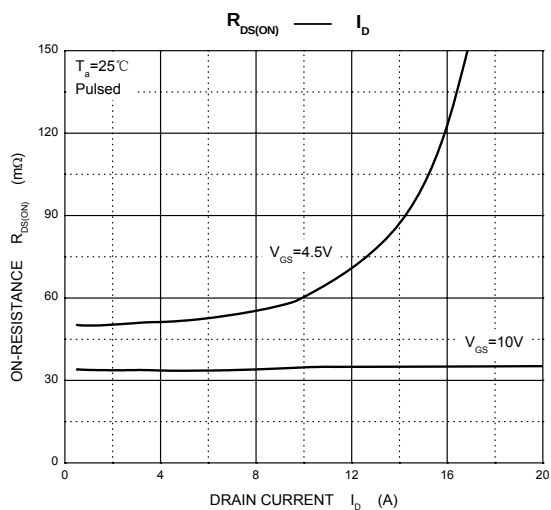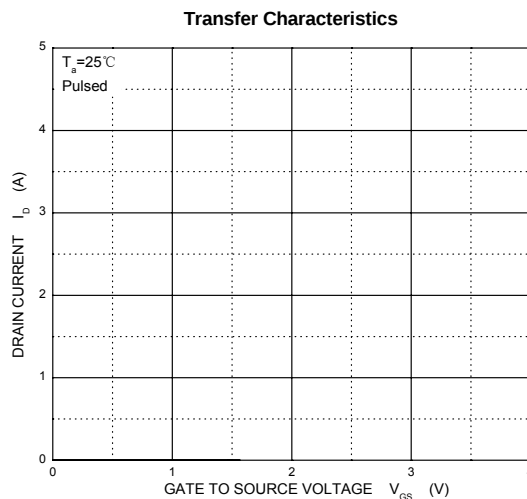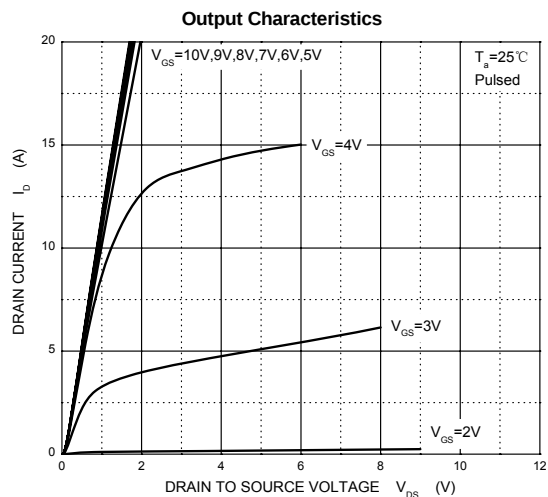




PACKAGE OUTLINE

Plastic surface mounted package; 3 leads

SOT-23

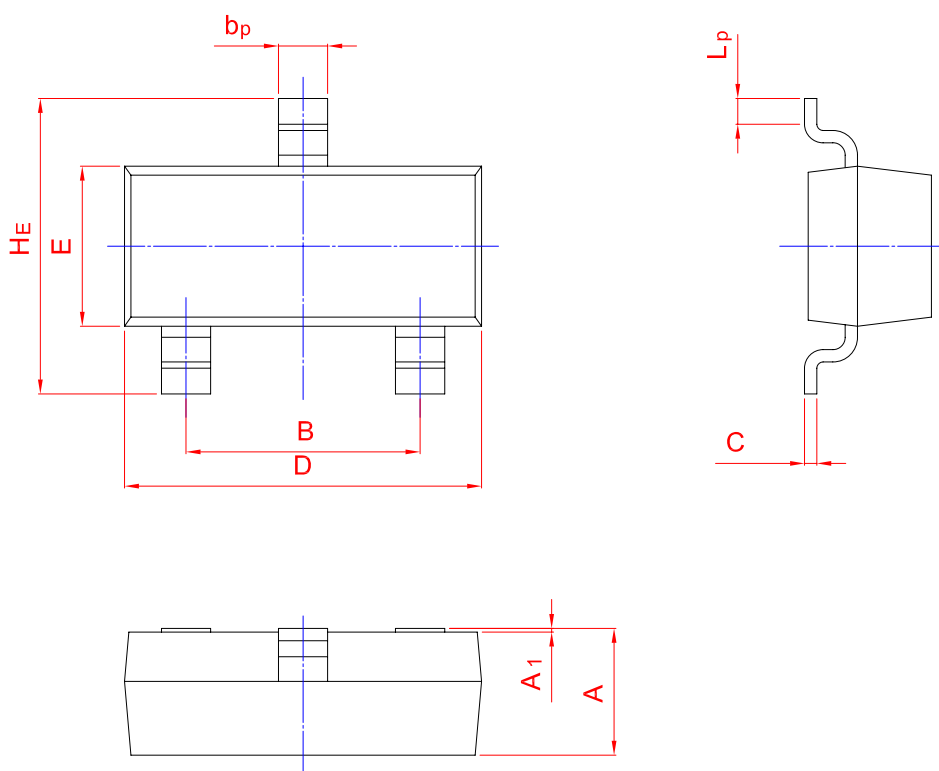

UNIT	A	B	bp	C	D	E	HE	A1	Lp
mm	1.40 0.95	2.04 1.78	0.50 0.35	0.19 0.08	3.10 2.70	1.65 1.20	3.00 2.20	0.100 0.013	0.50 0.20