




Digital Transistor DTA(R₁=R₂ SERIES)CA

FEATURES

- Epitaxial planar die construction.
- Complementary NPN types available(DTC).
- Built-in biasing resistors,R₁=R₂.
- Also available in lead free version.



SOT-23

APPLICATIONS

- The PNP style digital transistor.

ORDERING INFORMATION

Type No.	Marking	Package Code
DTA114ECA	14	SOT-23
DTA124ECA	15	SOT-23
DTA143ECA	13	SOT-23
DTA144ECA	16	SOT-23

MAXIMUM RATING @ Ta=25 °C unless otherwise specified

Symbol	Parameter	Value	Units
V _{CC}	Supply Voltage	-50	V
V _{IN}	Input Voltage DTA114ECA DTA124ECA DTA143ECA DTA144ECA	+10 to -40 +10 to -40 +10 to -30 +10 to -40	V
I _O	Output Current DTA114ECA DTA124ECA DTA143ECA DTA144ECA	-50 -30 -100 -30	mA
I _C (Max.)	Output current ALL	-100	mA
P _D	Power Dissipation	200	mW
R _{θJA}	Thermal Resistance, Junction to Ambient Air	625	°C/W
T _j	Junction Temperature	150	°C
T _{stg}	Operating and Storage and Temperature Range	-55 to +150	°C



ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

Parameter		Symbol	Test conditions	MIN	TYP	MAX	UNIT	
Input Voltage		V _{I(off)}	V _{CC} =-5V,I _O =-100μA	-0.5	-1.1	-	V	
Input Voltage	DTA114ECA DTA124ECA DTA143ECA DTA144ECA	V _{I(on)}	V _O =-0.3V,I _O =-10mA V _O =-0.2V,I _O =-5mA V _O =-0.3V,I _O =-20mA V _O =-0.3V,I _O =-2mA	-	-1.9	-3		
Output Voltage		V _{O(on)}	I _O /I _I =-10mA/-0.5mA,	-	-0.1	-0.3		V
Input Current	DTA114ECA DTA124ECA DTA143ECA DTA144ECA	I _I	V _I =-5V	-	-	-0.88 -0.36 -1.8 -0.18		mA
Output Current		I _{O(off)}	V _{CC} =-50V,V _I =0V	-	-	-0.5	μA	
DC Current Gain	DTA114ECA DTA124ECA DTA143ECA DTA144ECA	G _I	V _O =-5V,I _O =-5mA V _O =-5V,I _O =-5mA V _O =-5V,I _O =-10mA V _O =-5V,I _O =-5mA	30 56 20 68	-	-		
Input Resistor	DTA114ECA DTA124ECA DTA143ECA DTA144ECA	R ₁ (R ₂)		7 15.4 3.29 32.9	10 22 4.7 47	13 28.6 6.11 61.1	kΩ	
Resistance Ratio		R ₂ /R ₁	-	0.8	1	1.2		
Gain-Bandwidth Product		f _T	V _{CE} =-10V,I _E =5mA, f=100MHz	-	250	-	MHz	

TYPICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

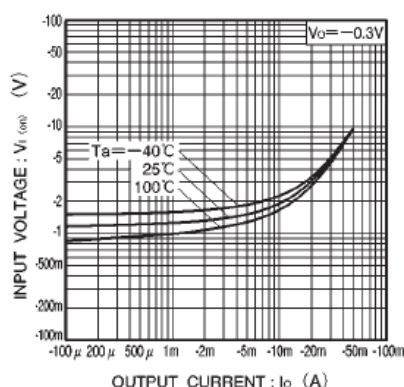


Fig.1 Input voltage vs. output current (ON characteristics)

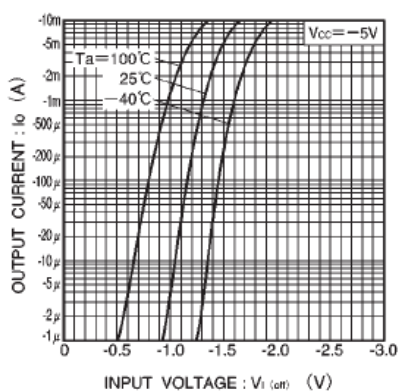


Fig.2 Output current vs. input voltage (OFF characteristics)

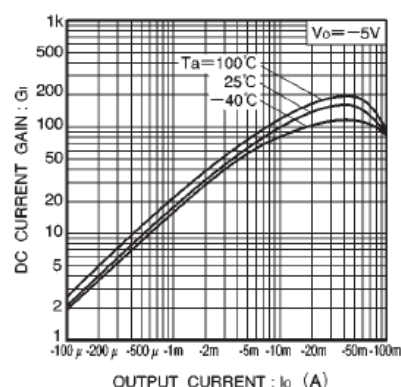




Fig.3 DC current gain vs. output current



PACKAGE OUTLINE

Plastic surface mounted package; 3 leads

SOT-23

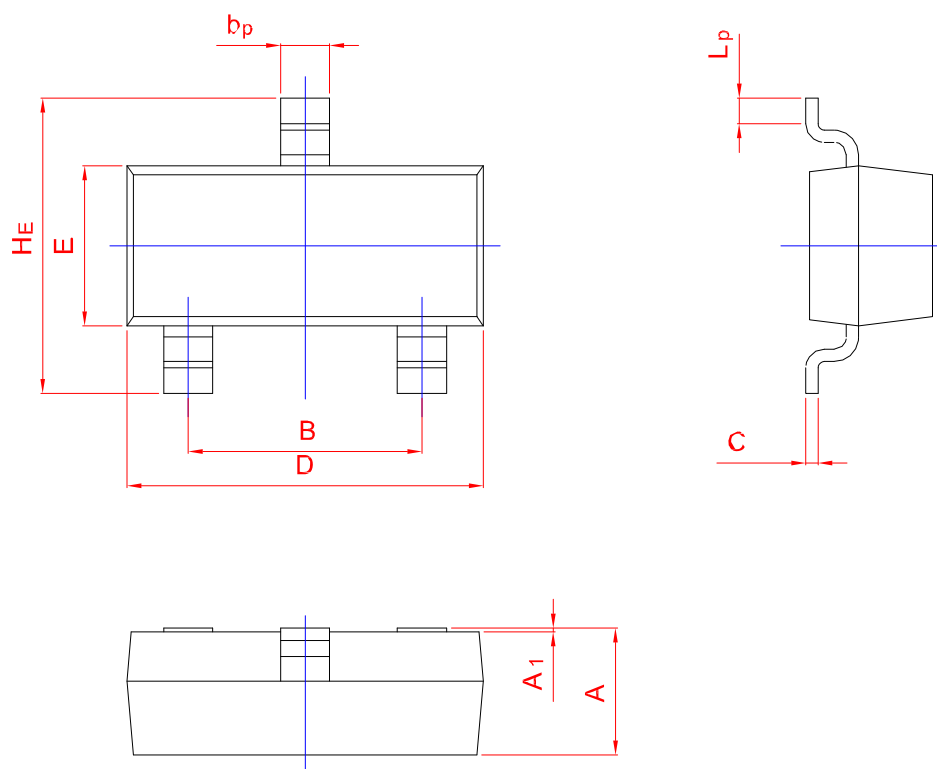

UNIT	A	B	b _p	C	D	E	HE	A ₁	L _p
mm	1.40	2.04	0.50	0.19	3.10	1.65	3.00	0.100	0.50
	0.95	1.78	0.35	0.08	2.70	1.20	2.20	0.013	0.20