





MMDT3356DW Plastic-Encapsulate Transistors

DUAL TRANSISTOR (NPN+NPN)

for microwave low noise amplifier at VHF,
UHF and CATV band

The transistor is subdivided into three
groups, S, according to its DC
current gain.

MARKING : LW

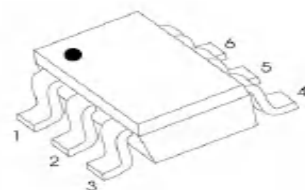

SOT-363







Absolute Maximum Ratings ($T_a = 25\text{ }^{\circ}\text{C}$)

Parameter	Symbol	Value	Unit
Collector Base Voltage	V_{CBO}	20	V
Collector Emitter Voltage	V_{CEO}	12	V
Emitter Base Voltage	V_{EBO}	3	V
Collector Current	I_C	100	mA
Power Dissipation	P_{tot}	200	mW
Junction Temperature	T_j	150	$^{\circ}\text{C}$
Storage Temperature Range	T_S	- 65 to + 150	$^{\circ}\text{C}$

Characteristics ($T_a = 25\text{ }^{\circ}\text{C}$)


Parameter	Symbol	Min.	Typ.	Max.	Unit
DC Current Gain at $V_{CE} = 10\text{ V}$, $I_C = 20\text{ mA}$ Current Gain Group S	h_{FE}	125	-	250	-
Collector Cutoff Current at $V_{CB} = 10\text{ V}$	I_{CBO}	-	-	1	μA
Emitter Cutoff Current at $V_{EB} = 1\text{ V}$	I_{EBO}	-	-	1	μA
Gain Bandwidth Product at $V_{CE} = 10\text{ V}$, $I_C = 20\text{ mA}$	f_T	-	7	-	GHz
Feed-Back Capacitance at $V_{CB} = 10\text{ V}$, $f = 1\text{ MHz}$	$C_{re}^{1)}$	-	0.55	1	pF
Noise Figure at $V_{CE} = 10\text{ V}$, $I_C = 7\text{ mA}$, $f = 1\text{ GHz}$	NF	-	1.1	2	dB

¹⁾ The emitter terminal and the case shall be connected to the guard terminal of the three-terminal capacitance bridge.

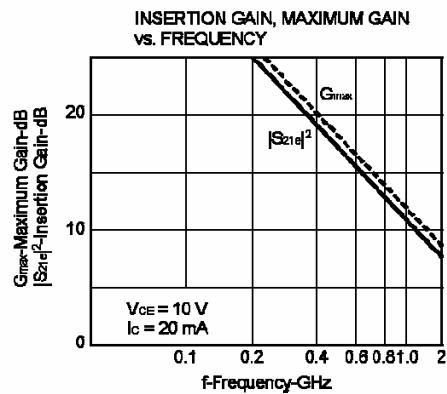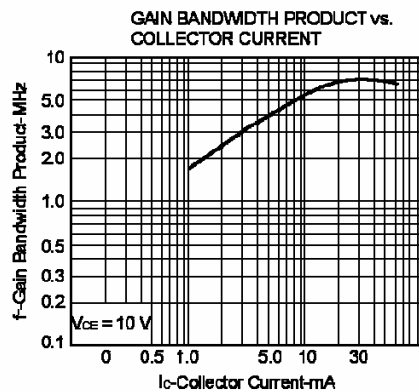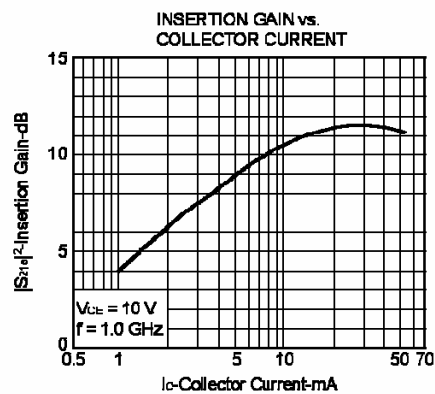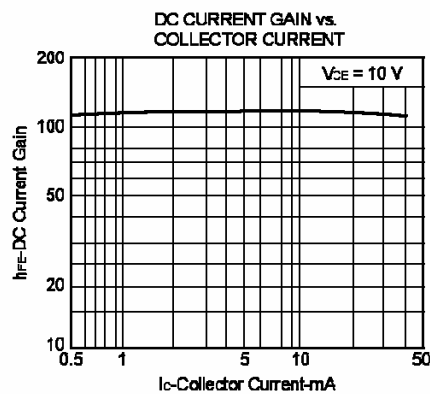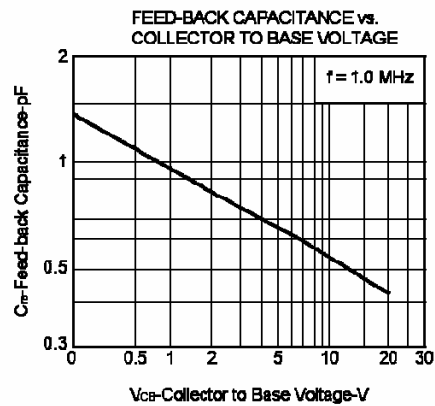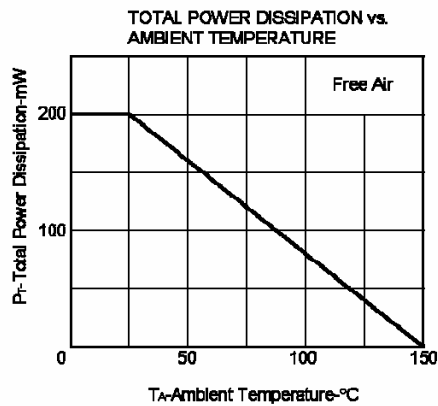




SOT-363 Package outline dimensions

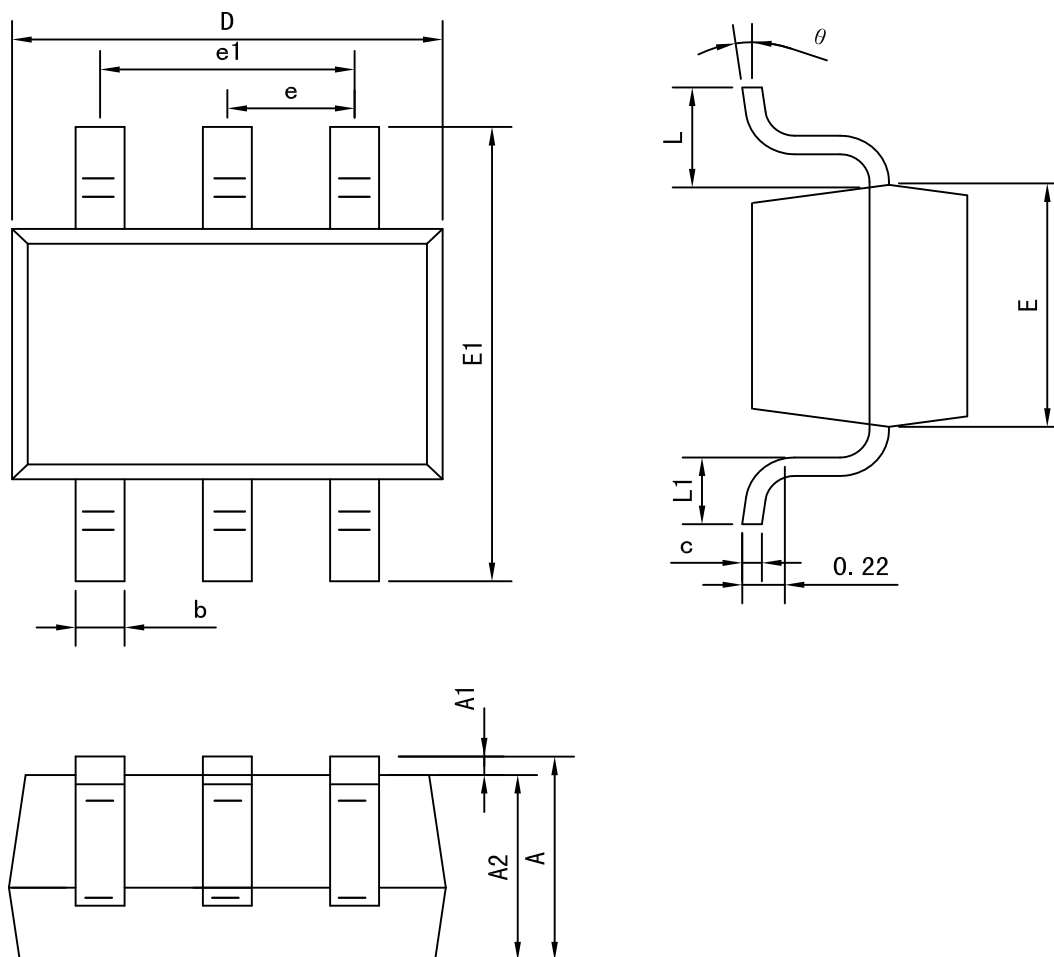

Symbol	Dimension in Millimeters	
	Min	Max
A	0.900	1.100
A1	0.000	0.100
A2	0.900	1.000
b	0.150	0.350
c	0.080	0.150
D	2.000	2.200
E	1.150	1.350
E1	2.150	2.450
e	0.650 TYP	
e1	1.200	1.400
L	0.525 REF	
L1	0.260	0.460
θ	0°	8°



SOT-363 Embossed Carrier Tape

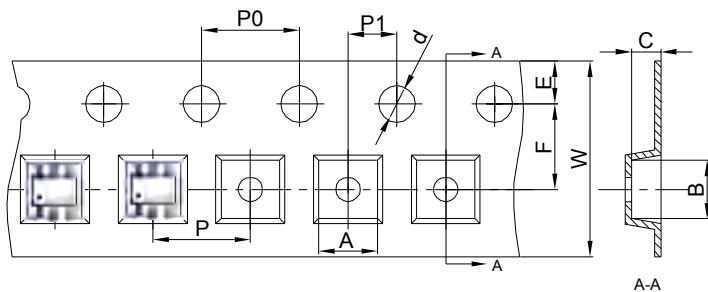

Packaging Description:

SOT-363 parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 3,000 units per 7" or 17.8cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
SOT-363	2.25	2.55	1.20	Ø1.50	1.75	3.50	4.00	4.00	2.00	8.00

SOT-363 Tape Leader and Trailer

