




TL431U Programmable Precision Reference

Features:

- Programmable output Voltage to 36 V
- Low dynamic output impedance
- Sink current capability of 1 to 100 mA
- Low output noise voltage
- Fast turn on response



1.Reference 2.Anode 3.Cathode

SOT-89-3L

Marking: 431

Absolute Maximum Ratings ($T_a = 25\text{ }^{\circ}\text{C}$, unless otherwise noted.)

Parameter	Symbol	Value	Unit
Cathode Voltage	V_{KA}	37	V
Cathode Current Range (Continuous)	I_{KA}	- 100 to + 150	mA
Reference Input Current Range	I_{REF}	- 0.05 to + 10	mA
Power Dissipation	P_D	770	mW
Operating Temperature Range	T_{opr}	- 25 to + 85	$^{\circ}\text{C}$
Junction Temperature	T_j	150	$^{\circ}\text{C}$
Storage Temperature Range	T_{stg}	- 65 to + 150	$^{\circ}\text{C}$

Recommended Operating Conditions

Parameter	Symbol	Min.	Max.	Unit
Cathode Voltage	V_{KA}	V_{REF}	36	V
Cathode Current	I_{KA}	1	100	mA

Characteristics at $T_a = 25\text{ }^{\circ}\text{C}$

Parameter	Symbol	Min.	Typ.	Max.	Unit
Reference Input Voltage at $V_{KA} = V_{REF}$, $I_{KA} = 10\text{ mA}$	V_{REF}	2.44	2.495	2.55	V
Deviation of Reference Input Voltage Over Temperature at $V_{KA} = V_{REF}$, $I_{KA} = 10\text{ mA}$, $- 25\text{ }^{\circ}\text{C} \leq T_a \leq + 85\text{ }^{\circ}\text{C}$	$\Delta V_{REF} / \Delta T$	-	4.5	17	mV
Ratio of Change in Reference Input Voltage to the Change in Cathode Voltage at $I_{KA} = 10\text{ mA}$ $\Delta V_{KA} = 10\text{ V to } V_{REF}$ $\Delta V_{KA} = 36\text{ V to } 10\text{ V}$	$\Delta V_{REF} / \Delta V_{KA}$	- -	-1.0 -0.5	-2.7 -2	mV/V
Reference Input Current at $I_{KA} = 10\text{ mA}$, $R1 = 10\text{ K}\Omega$, $R2 = \infty$	I_{REF}	-	1.5	4	μA
Deviation of Reference Input Current Over Full Temperature at $I_{KA} = 10\text{ mA}$, $R1 = 10\text{ K}\Omega$, $R2 = \infty$, $- 25\text{ }^{\circ}\text{C} \leq T_a \leq + 85\text{ }^{\circ}\text{C}$	$\Delta I_{REF} / \Delta T$	-	0.4	1.2	μA
Minimum Cathode Current for Regulation at $V_{KA} = V_{REF}$	$I_{KA(min)}$	-	0.45	1	mA
Off-Stage Cathode Current at $V_{KA} = 36\text{ V}$, $V_{REF} = 0$	$I_{KA(OFF)}$	-	0.05	1	μA
Dynamic Impedance at $V_{KA} = V_{REF}$, $I_{KA} = 1\text{ to } 100\text{ mA}$, $f \leq 1\text{ KHz}$	Z_{KA}	-	0.15	0.5	Ω



Fig 1 Cathode Current
Vs Cathode Voltage

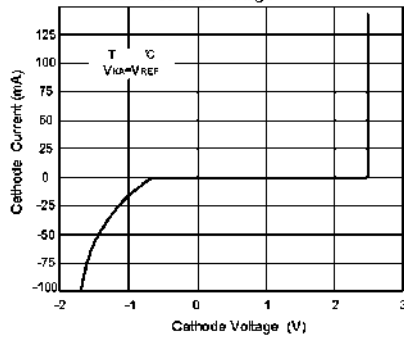


Fig 2 Cathode Current
Vs Cathode Voltage

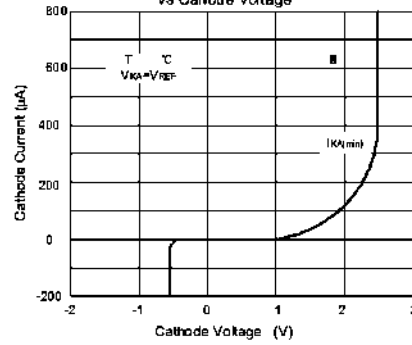


Fig 3 Change in Reference Input
Voltage Vs Cathode voltage

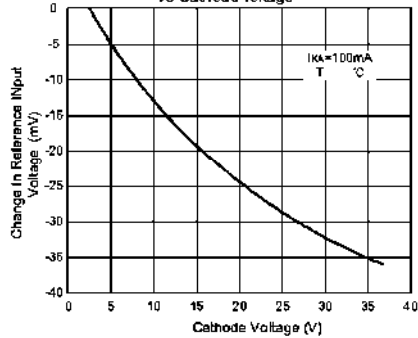


Fig 4 Pulse Response

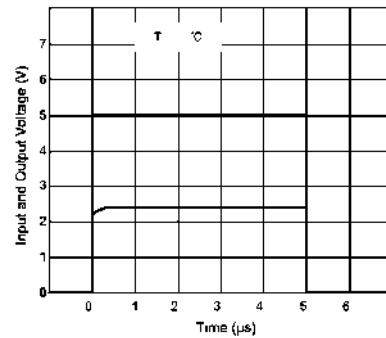


Fig 5 Dynamic Impedance
Vs Frequency



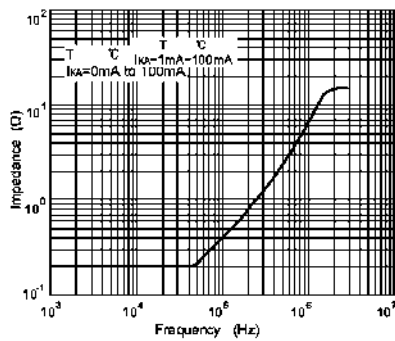


Fig 6 Small Signal Voltage
Amplification Vs Frequency



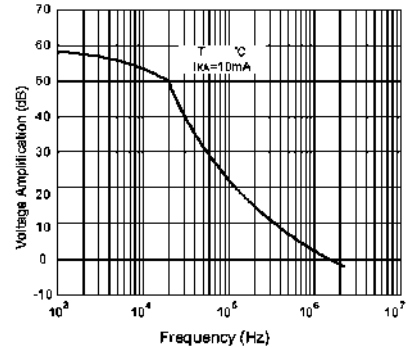

SOT-89-3L Outlines Dimensions

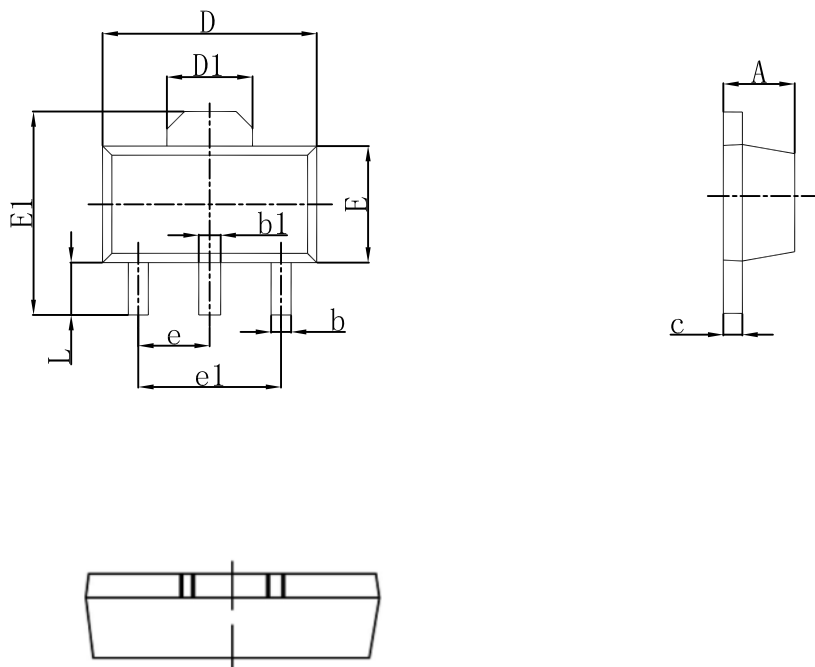

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.400	1.600	0.055	0.063
b	0.320	0.520	0.013	0.020
b1	0.400	0.580	0.016	0.023
c	0.350	0.440	0.014	0.017
D	4.400	4.600	0.173	0.181
D1	1.550 REF.		0.061 REF.	
E	2.300	2.600	0.091	0.102
E1	3.940	4.250	0.155	0.167
e	1.500 TYP.		0.060 TYP.	
e1	3.000 TYP.		0.118 TYP.	
L	0.900	1.200	0.035	0.047