




MMBTSC3356 NPN Silicon Epitaxial Planar Transistor

for microwave low noise amplifier at VHF,
UHF and CATV band

The transistor is subdivided into three
groups, Q, R and S, according to its DC
current gain.

Marking : R25



1.Base 2.Emitter 3.Collector

SOT-23







Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Collector Base Voltage	V_{CBO}	20	V
Collector Emitter Voltage	V_{CEO}	12	V
Emitter Base Voltage	V_{EBO}	3	V
Collector Current	I_C	100	mA
Power Dissipation	P_{tot}	200	mW
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature Range	T_S	- 65 to + 150	$^\circ\text{C}$

Characteristics ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Min.	Typ.	Max.	Unit
DC Current Gain at $V_{CE} = 10\text{ V}$, $I_C = 20\text{ mA}$ Current Gain Group	Q				
	R				
	S				
	h_{FE}	50	-	100	-
	h_{FE}	80	-	160	-
	h_{FE}	125	-	250	-
Collector Cutoff Current at $V_{CB} = 10\text{ V}$	I_{CBO}	-	-	1	μA
Emitter Cutoff Current at $V_{EB} = 1\text{ V}$	I_{EBO}	-	-	1	μA
Gain Bandwidth Product at $V_{CE} = 10\text{ V}$, $I_C = 20\text{ mA}$	f_T	-	7	-	GHz
Feed-Back Capacitance at $V_{CB} = 10\text{ V}$, $f = 1\text{ MHz}$	$C_{re}^{1)}$	-	0.55	1	pF
Noise Figure at $V_{CE} = 10\text{ V}$, $I_C = 7\text{ mA}$, $f = 1\text{ GHz}$	NF	-	1.1	2	dB

¹⁾ The emitter terminal and the case shall be connected to the guard terminal of the three-terminal capacitance bridge.

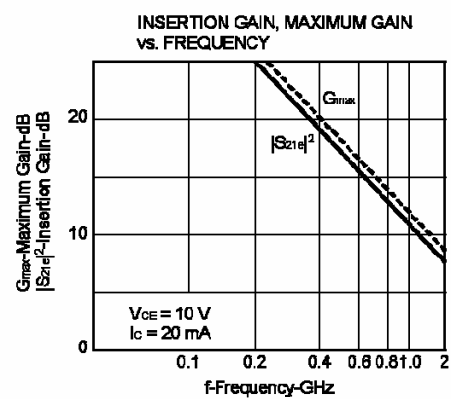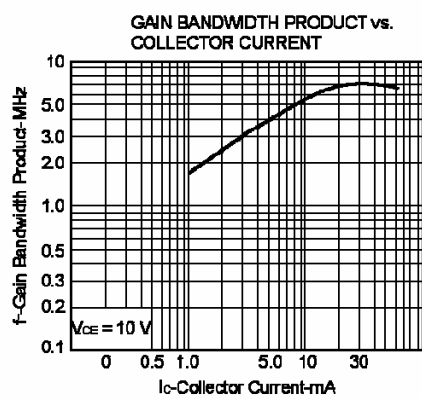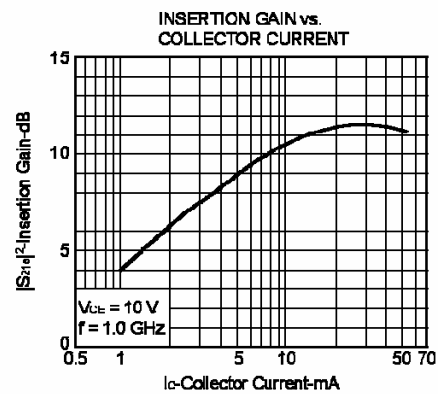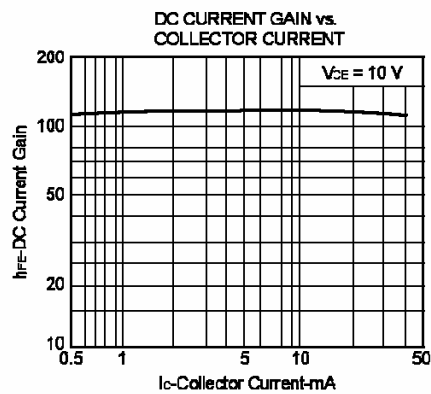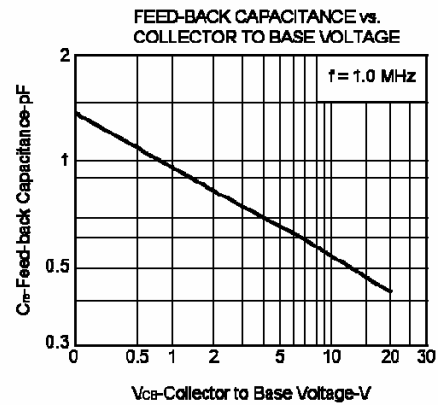
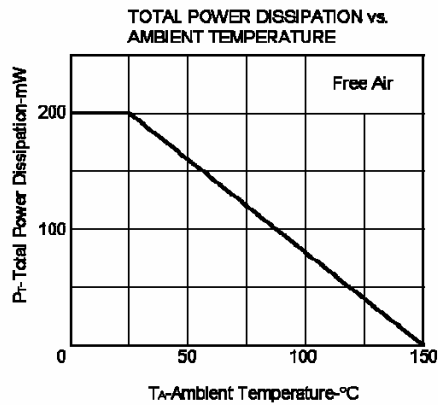




PACKAGE OUTLINE

Plastic surface mounted package; 3 leads

SOT-23

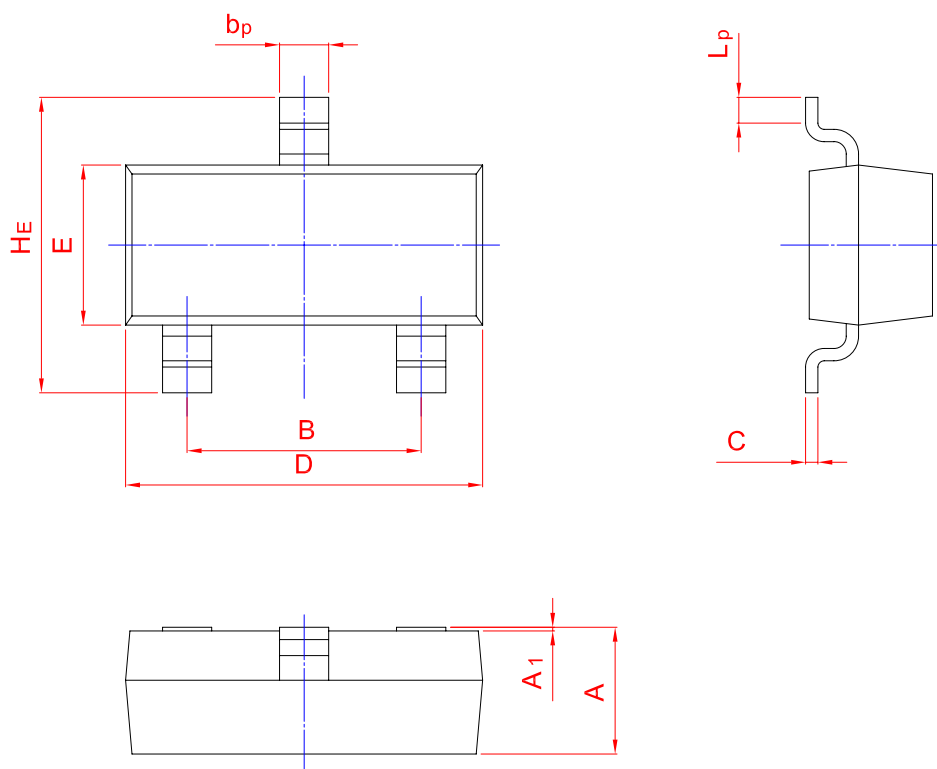

UNIT	A	B	bp	C	D	E	HE	A1	Lp
mm	1.40 0.95	2.04 1.78	0.50 0.35	0.19 0.08	3.10 2.70	1.65 1.20	3.00 2.20	0.100 0.013	0.50 0.20